PIPING CONNECTION

- EASY INSTALLATION
- BOOST WATER SIMULTANEOUSLY
- ENERGY EFFICIENT
- SPACE SAVING
- DRY RUNNING PROTECTION
- QUIET OPERATION
- 3 YEARS WARRANTY
- RUST FREE
- MOTOR OVERHEATING PROTECTION
- LONGER LIFE SPAN

LEGEND:

Cold Water

Hot Water

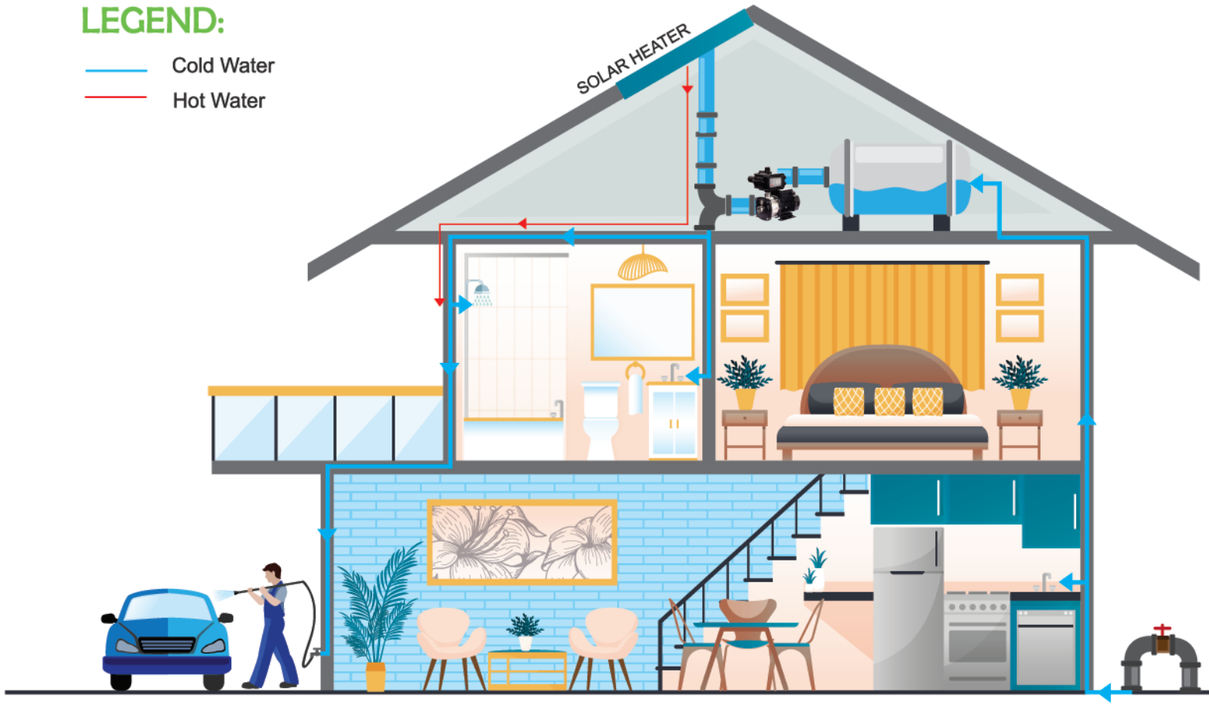

Sorento
BUILT TO FLOW

Sole Distributor:
SORENTO SDN BHD (694526-P)
Lot 5083, Off 5 Miles, Jalan Meru,
41050 Klang, Selangor.
Tel: +603-3393 1678 Fax: +603-3392 6366
Website: www.sorento.com.my
Email: sorento@sorento.com.my

Authorised Dealer

*** Images are for illustration purposes. Model outlook and specifications may alter in the future without prior notice.*

Sorento
BUILT TO FLOW

THE ALL NEW
AUTOMATIC WATER BOOSTER PUMP

The Perfect Water Pressure throughout Your Home

3 YEARS WARRANTY
E-WARRANTY
ONLINE REGISTRATION

Sorento
BUILT TO FLOW

Sorento Automatic Water Booster Pump Series delivers the perfect water pressure to your entire home, even when multiple showers or taps are running at the same time.

At last, the whole family will be able to enjoy a strong & stable water pressure!

IDENTIFICATION DETAILS & FEATURES

ELECTRONIC PRESSURE CONTROL
Built in Dry Run Protection automatically controls pump start and stop whenever a valve is opened or closed respectively.

OUTLET
Delivers the water out

TRIPLE INDICATOR LIGHT
Green: Power On
Yellow: Pump On
Red: Failure

RESET BUTTON
Reset the system whenever there is a faulty condition

TERMINAL BOX
Easy maintenance compartment for wiring access to the motor wires

DISCHARGE PORT
Delivers the water from the pump into the controller

VENTILATION COVER
Allows air to cool the motor yet prevents finger access

STAINLESS STEEL PUMP HOUSING
SUS304 is able to withstand rust and rapture

MOTOR WITH BUILT-IN THERMAL CUT-OFF
High efficiency and low noise motor

ALLOY PUMP CLAMP PLATE
Lightweight and durable aluminium alloy holds the stainless steel pump housing

MOUNTING BRACKET
Designed for a firm grip and a balanced support

SUCTION PORT
Water delivery inlet

MECHANICAL SEAL
Silicon carbide mechanical seal for longer operation and durability

STAINLESS STEEL IMPELLERS
High efficiency multistage impellers designed with SUS304 rust-free material is able to withstand high dynamic stresses

PRODUCTS

SRTPP3-30PC

SRTPP3-40PC

SRTPP3-50PC

SRTPP5-40PC

SRTPP5-60PC

PERFORMANCE, SPECIFICATIONS, DIMENSIONS

MODEL	Driving motor P_2 (kW)	0.8	1.2	1.6	2.0	2.4	2.8	3.0	3.2	3.6	4.0		INLET	OUTLET	RECOMMENDED USAGE
SRTPP3-30PC	0.37	27	26	25	24	23	22	21	20	17	15		1"	1"	
SRTPP3-40PC	0.55	36	35	34	32	31	29	28	27	23	20		1"	1"	
SRTPP3-50PC	0.55	44	43	42	40	38	36	34	33	28.5	24		1"	1"	
MODEL	Driving motor P_2 (kW)	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	INLET	OUTLET	RECOMMENDED USAGE
SRTPP5-40PC	0.75	38	37	36	34	33.5	32	30	28	27	24	20	1¼"	1"	
SRTPP5-60PC	1.3	56.5	55	54	53	52.5	51	49	45	44	42	36	1¼"	1"	
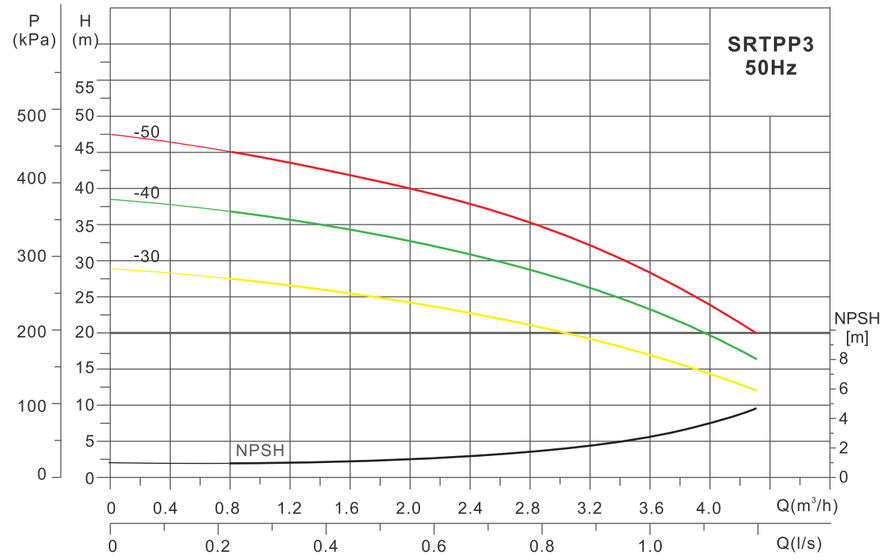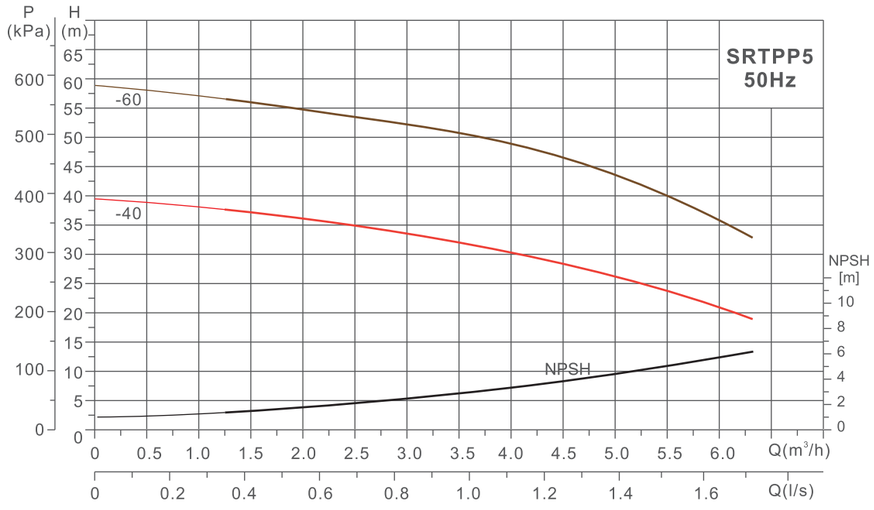
PERFORMANCE CURVES